




SM 25 HP/AP

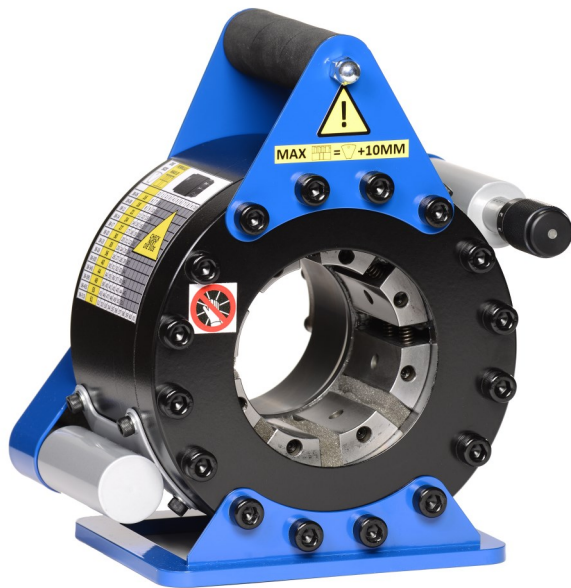

TECHNICAL SPECIFICATIONS

| | |
|--|---------------------|
| Max hose size | 1" 4 SH, 1 1/2" |
| Crimping force (kN): | 1200 |
| Max ferrule diameter (mm): | 61 |
| Max opening diameter (mm): | die diameter + 23 |
| Actuation / HP model: | Two-speed hand pump |
| Actuation / AP model: | Air pressure |
| Control: | Micrometer with led |
| Master dies opening / Length (mm): | 98/64,5 |
| Crimping range (mm): | 6 – 61 |
| Crimping unit weight (kg): | 25 |
| Crimping unit dimensions (LxWxH mm) | 230 x 200 x 275 |

DIE SET OPTIONS

| | Range (mm) | Length |
|----------------|-------------------|---------------|
| 38-06 | 6-16 | 45 |
| 38-08 | 8-18 | 45 |
| 38-11 | 11-21 | 45 |
| 38-14 | 14-24 | 45 |
| 38-17 | 17-27 | 45 |
| 38-20 | 20-30 | 55 |
| 38-23 | 23-33 | 55 |
| 38-26 | 26-36 | 55 |
| 38-30S | 30-40 | 60 |
| 38-34S | 34-44 | 60 |
| 38-39S | 39-49 | 65 |
| 38-45S | 45-55 | 65 |
| 38-51S* | 51-61 | 65 |

* Max. ferrule diameter before crimping 61 mm

HAND PUMP / AIR PUMP

